


OUR SECTORS

Energy

We serve this sector through leasing and selling Flatracks and Open Top Containers worldwide.

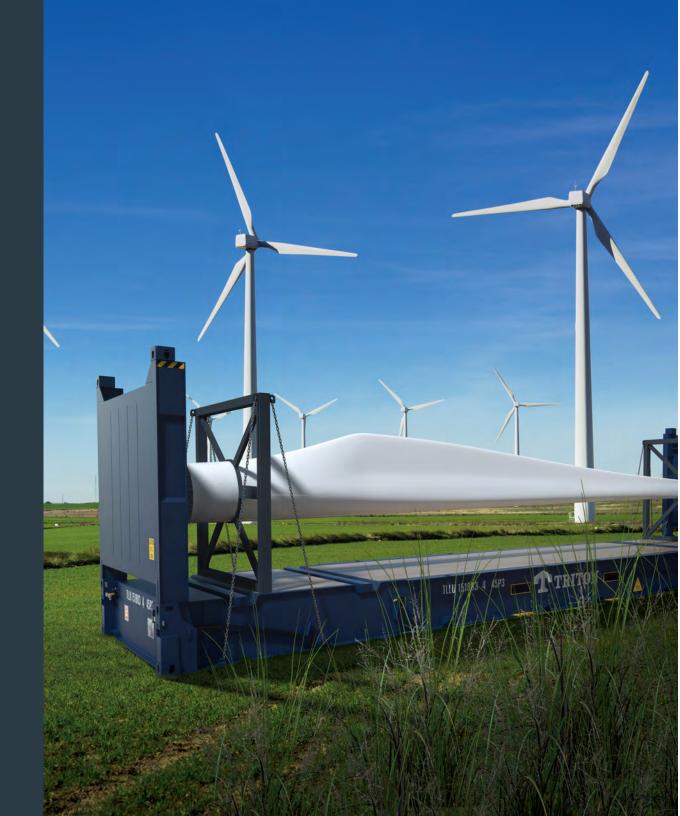

OUR SECTORS - ENERGY

We stock Flatracks, Open Top, and Dry Containers globally

Our equipment is designed to handle harsh environments and challenging working conditions.

Energy and renewable energy equipment can be challenging to transport; solar panels are fragile and susceptible to damage; wind turbines are typically heavy and oversized. In addition, the pipes, oil drums, machinery, and other equipment used in oil and gas operations also usually fail to adhere to ISO Container dimensions and are therefore difficult to load and ship safely.

Quality equipment available worldwide

We lease and sell a range of equipment specifically engineered to carry heavier loads and out of gauge cargo, including Flatracks and Open Top Containers. Our vast international operating infrastructure allows us to deliver an unrivaled equipment supply to our customers. At the same time, our scale enables us to operate with the lowest cost ratios in the industry.

Renewable energy conversions

It is possible to convert purchased Triton Dry Containers into bespoke housings for solar and wind energy producers. They can also be used as cost-effective, secure battery banks to create scalable energy solutions.

Our commitment

At Triton, we work closely with our manufacturers to make environmentally-friendly improvements to our manufacturing processes and our equipment designs.

PLEASE NOTE: The following pages showcase a small sample of products in the Triton global inventory. We stock a wide range of products for lease and sale in various conditions. Get in touch with your local Triton representative for more information.





For Sale: New

Available via Triton's global network of supply locations.

20ft Dry Container




- Manufactured with rust resistant corten steel
- · Secure and weatherproof, with vents to allow airflow
- Resistant to damage and corrosion
- Superior paint systems

- · Great options including 80 micron floor coating, lock boxes, waist-high door locking handles
- · Incredibly versatile and suitable for customers to modify into a wide range of applications

- Advance orders in your preferred color (minimum volume required)
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Moved from factory to most major ports in the world
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Available globally



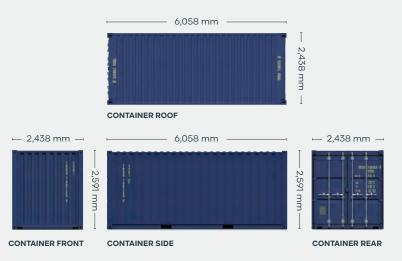

EXTERNAL DIMENSIONS

| Length | 6,058 mm | 19′ 10.5″ |
|--------|----------|-----------|
| Width | 2,438 mm | 8′ 0.0″ |
| Height | 2,591 mm | 8′ 6.0″ |

INTERNAL DIMENSIONS

| Length | 5,898 mm | 19′ 4.2 |
|--------|----------|---------|
| Width | 2,352 mm | 7′ 8.6 |
| Height | 2,393 mm | 7′ 10.2 |

DOOR OPENING

| Width | 2,343 mm | 7′ 8.2′ | |
|--------|----------|---------|--|
| Height | 2,280 mm | 7′ 5.8′ | |

CAPACITY & WEIGHTS

| Inside Cubic Cap | acity 33 m ³ | 1165.4 ft° |
|------------------|-------------------------|------------|
| Max Gross | 30,480 kg | 67,200 lbs |
| Payload | 28,450 kg | 62,721 lbs |
| Tare | 2,030 kg | 4475 lbs |

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.





Lease

Available via Triton's global network of supply locations.


40ft High Cube Dry Container



- · Additional height provides extra internal cubic capacity, which means greater interior stacking capacity for your goods
- · Manufactured with rust resistant corten steel

- Superior paint systems
- · Resistant to damage and corrosion
- · Secure and weatherproof, with vents to allow airflow
- · Incredibly versatile

- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Available globally
- · IICL-6 repair criteria saves cost at off-hire
- Damage Protection Plan available to reduce costs and time at off-hire
- Flexible lease terms to meet your company needs

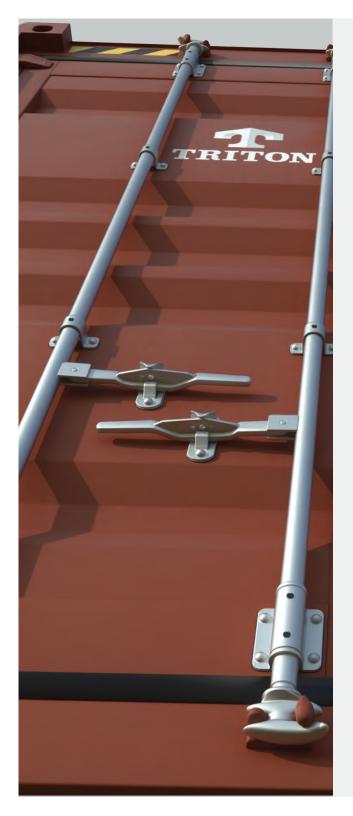





EXTERNAL DIMENSIONS

| Length | 12,192 mm | 40′ 0.0″ |
|--------|-----------|----------|
| Width | 2,438 mm | 8′ 0.0″ |
| Height | 2,896 mm | 9′ 6.0″ |

INTERNAL DIMENSIONS

| Length | 12,032 mm | 39′ 5.7 | |
|--------|-----------|----------|--|
| Width | 2,352 mm | 7′ 8.6′ | |
| Height | 2,698 mm | 8′ 10.2′ | |

DOOR OPENING

| Width | 2,340 mm | 7′ 8.1″ | |
|--------|----------|---------|--|
| Height | 2,585 mm | 8′ 5.8″ | |

CAPACITY & WEIGHTS

| Inside Cubic Cap | acity 76.4 m ³ | 2,700 ft ^s |
|------------------|---------------------------|-----------------------|
| Max Gross | 32,500 kg | 71,650 lbs |
| Payload | 28,800 kg | 63,490 lbs |
| Tare | 3,700 kg | 8,160 lbs |

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.





Available via Triton's global network of supply locations.


40ft **Used Dry** Container



- · Available in a range of conditions to suit all needs, from cargo transportation to secure domestic storage
- · Generally 11-15 years old when retired from service
- · Constructed from rugged corten steel
- Durable and secure, with vents to allow airflow
- · Resistant to damage and corrosion

- · A variety of options available
- · Incredibly versatile and suitable for customers to modify into a wide range of applications
- · Available globally

- · Backed up by Triton's global network of supply locations and dedicated sales and support teams
- · Also available for direct delivery to buyer's facilities, providing significant cost savings on transport

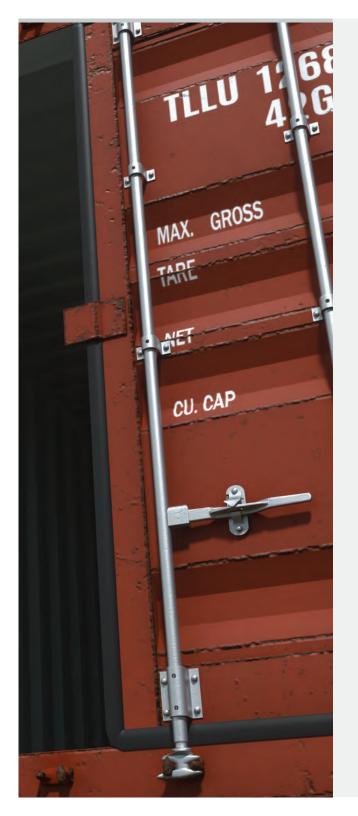



EXTERNAL DIMENSIONS

| Length | 12,192 mm | 40′ 0.0″ |
|--------|-----------|----------|
| Width | 2,438 mm | 8′ 0.0″ |
| Height | 2,591 mm | 8′ 6.0″ |

INTERNAL DIMENSIONS

| Length | h 12,032 mm | |
|--------|--------------------|----------|
| Width | 2,352 mm | 7′ 8.6″ |
| Height | 2,393 mm | 7′ 10.2″ |

DOOR OPENING

| Width | 2,340 mm | 7′ 8.1″ |
|--------|----------|---------|
| Height | 2,280 mm | 7′ 5.8″ |

CAPACITY & WEIGHTS

| Inside Cubic | Capacity | 67.7 m ³ | 2390 f | ť |
|--------------|----------|---------------------|------------------|----|
| Max Gross | 30,480-3 | 2,500 kg | 67,200-71,650 lb | S |
| Payload | 26,980-2 | .9,070 kg | 59,484-64,090 lb |)S |
| Tare | 3,430- | 3,920 kg | 7,560–8,640 lb | S |

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.





Lease

Available via Triton's global network of supply locations.


20ft Open Top Container




- · Corrugated steel panels with strong wooden floor to protect the cargo
- Designed for cargos that require special loading dimensions
- · Removable door header

- · Removable roof bows and durable tarpaulin with customs approved cable to cover the topside
- · Two swingable doors with custom approved closures
- 11/8" thick marine wooden floors with center dividers

- · Several lashing rings and bars inside the container to secure the cargo
- · Forklift pockets for easy empty handling
- · Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- · Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- · Available in the high demand hub ports
- Flexible lease terms to meet your company needs

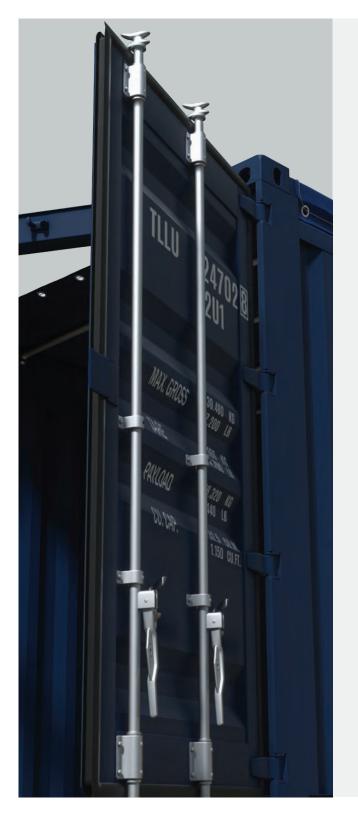

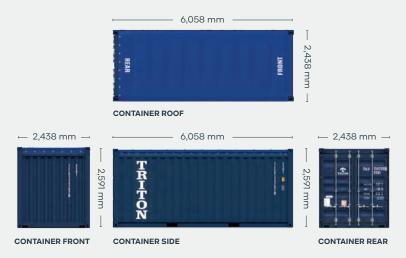

EXTERNAL DIMENSIONS

| Length | 6,058 mm | 19′ 10.5″ |
|--------|----------|-----------|
| Width | 2,438 mm | 8′ 0.0″ |
| Height | 2,591 mm | 8′ 6.0″ |

INTERNAL DIMENSIONS

| Length | 5,895 mm | 19′ 4.2 |
|-----------------------------|----------|---------|
| Width (Between side panels) | 2,352 mm | 7′ 8.6 |
| Height | 2,348 mm | 7′ 8.4 |

DOOR OPENING

| Width | 2,340 mm | 7′ 8.1″ |
|--------|----------|---------|
| Height | 2,280 mm | 7′ 5.8″ |

CAPACITY & WEIGHTS

| Inside Cubic Cap | acity 32.5 m³ | 1,150 ft° |
|------------------|---------------|------------|
| Max Gross | 30,480 kg | 67,200 lbs |
| Payload | 28,320 kg | 62,440 lbs |
| Tare | 2,160 kg | 4,760 lbs |

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.





Lease

Available via Triton's global network of supply locations.

40ft **Open Top** Container




- · Corrugated steel panels with strong wooden floor to protect the cargo
- Designed for cargos that require special loading dimensions
- · Removable door header

- · Removable roof bows and durable tarpaulin with customs approved cable to cover the topside.
- · Two swingable doors with custom approved closures
- 11/8" thick marine wooden floors with center dividers

- · Several lashing rings and bars inside the container to secure the cargo
- · Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- · Available in the high demand hub ports
- · Flexible lease terms to meet your company needs



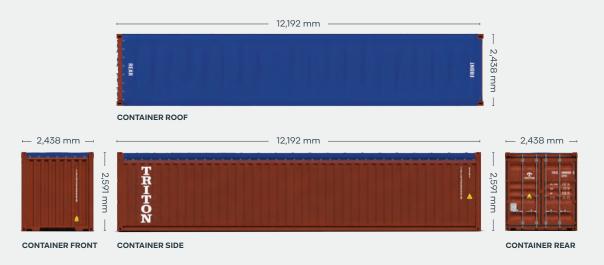

EXTERNAL DIMENSIONS

| Length | 12,192 mm | 40′ 0.0″ |
|--------|-----------|----------|
| Width | 2,438 mm | 8′ 0.0″ |
| Height | 2,591 mm | 8′ 6.0″ |

INTERNAL DIMENSIONS

| Length | 12,032 mm | 39′ 5.7′ |
|--------|-----------|----------|
| Width | 2,352 mm | 7′ 8.6′ |
| Height | 2,348 mm | 7′ 8.4′ |

DOOR OPENING

| Width | 2,340 mm | 7′ 8.1′ |
|--------|----------|---------|
| Height | 2,280 mm | 7′ 5.8′ |

CAPACITY & WEIGHTS

| Inside Cubic Cap | acity 65.9 m³ | 2330 ft ^s |
|------------------|---------------|----------------------|
| Max Gross | 32,500 kg | 71,650 lbs |
| Payload | 28,760 kg | 63,400 lbs |
| Tare | 3,740 kg | 8,250 lbs |

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.



ightrightarrows ightharpoons ightharpoo



CLASSIFICATION

Lease

Available via Triton's global network of supply locations.


40ft High Cube **Open Top** Container




- · Corrugated steel panels with strong wooden floor to protect the cargo
- Designed for cargos that require special loading dimensions
- · Removable door header

- · Removable roof bows and durable tarpaulin with customs approved cable to cover the topside.
- · Two swingable doors with custom approved closures
- 11/8" thick marine wooden floors with center dividers

- · Several lashing rings and bars inside the container to secure the cargo
- · Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- · Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- · Available in the high demand hub ports
- · Flexible lease terms to meet your company needs

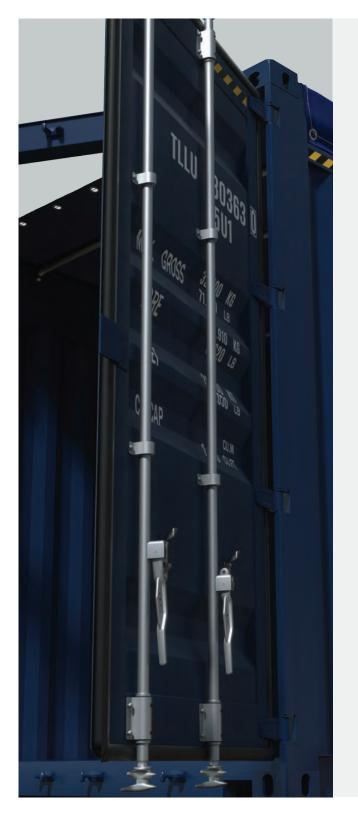

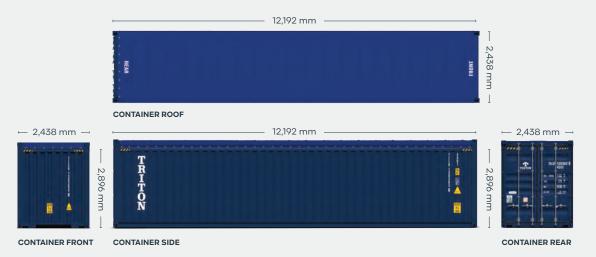

EXTERNAL DIMENSIONS

| Length | 12,192 mm | 40′ 0.0″ |
|--------|-----------|----------|
| Width | 2,438 mm | 8′ 0.0″ |
| Height | 2,896 mm | 9′ 6.0″ |

INTERNAL DIMENSIONS

| Length | 12,032 mm | 39′ 5.7′ |
|--------|-----------|----------|
| Width | 2,352 mm | 7′ 8.6′ |
| Height | 2,653 mm | 8′ 8.4′ |

DOOR OPENING

| Width | 2,340 mm | 7′ 8.1″ |
|--------|----------|---------|
| Height | 2,585 mm | 8′ 5.8″ |

CAPACITY & WEIGHTS

| Max Gross | 32,500 kg | 71,650 lbs |
|-----------|-----------|------------|
| Payload | 28,590 kg | 63,030 lbs |
| Tare | 3,910 kg | 8,620 lbs |

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.






Available via Triton's global network of supply locations.

20ft Used **Open Top** Container



- · Rugged corrugated steel exterior panels with a thick wooden floor
- Designed for cargos that require special loading dimensions
- · Removable roof bows and heavy duty tarpaulin
- Swivel-out door header
- 14 gauge corrugated steel sides and 14 gauge locking steel double-end swing doors
- 11/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- · Tie down steel lashing rings, 4000 lbs. cap. each
- (2) way laden fork lift pockets

- Security roof tarpaulin locking cable
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- · Available globally

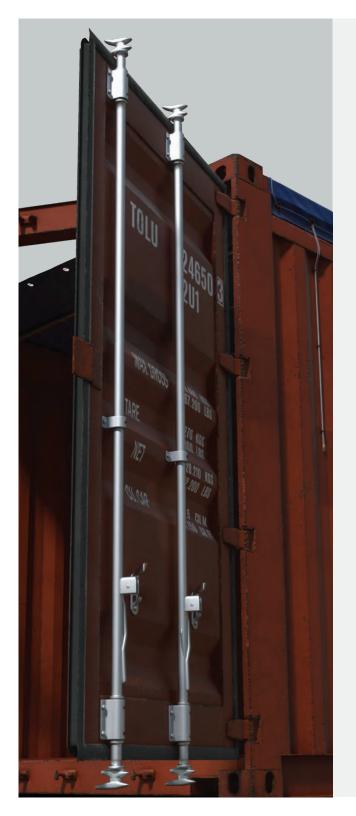



EXTERNAL DIMENSIONS

| Length | 6,058 mm | 19′ 10.5″ |
|--------|----------|-----------|
| Width | 2,438 mm | 8′ 0.0″ |
| Height | 2,591 mm | 8′ 6.0″ |

INTERNAL DIMENSIONS

| Length | 5,895 mm | 19′ 4.2′ |
|-----------------------------|----------|----------|
| Width (Between side panels) | 2,352 mm | 7′ 8.6′ |
| Height | 2,348 mm | 7′ 8.4′ |

DOOR OPENING

| Width | 2,340 mm | 7′ 8.1″ |
|--------|----------|---------|
| Height | 2,280 mm | 7′ 5.8″ |

CAPACITY & WEIGHTS

| Inside Cubic | Capacity 32.5 m ^s | 1,150 ft [*] |
|--------------|------------------------------|-----------------------|
| Max Gross | 30,480 kg | 67,200 lbs |
| Payload | 27,780-28,320 kg | 61,250-62,440 lbs |
| Tare | 2,160-2,700 kg | 4,760–5,950 lbs |

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.





Available via Triton's global network of supply locations.


40ft Used Open Top Container




- Rugged corrugated steel exterior panels with a thick wooden floor
- Designed for cargos that require special loading dimensions
- · Removable roof bows and heavy duty tarpaulin
- Swivel-out door header
- 14 gauge corrugated steel sides
- 14 gauge locking steel double end swing doors

- 11/8" thick marine plywood floors/omega-3 floors, forklift tested to 16,000 lbs per 44 square inches
- · Tie down steel lashing rings, 4000 lbs. cap. each
- (2) way laden fork lift pockets

- · Security roof tarpaulin locking cable
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Available globally

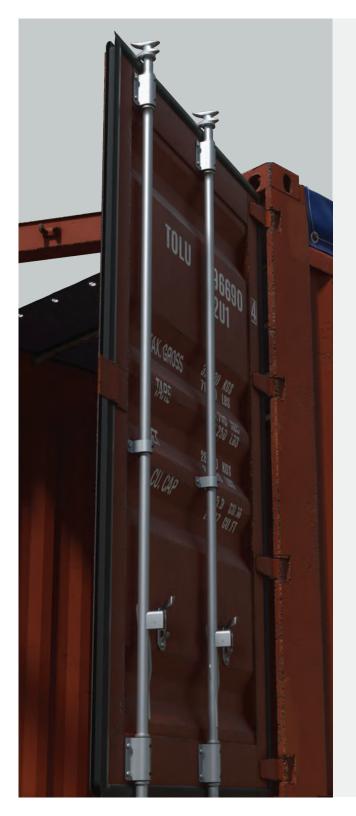

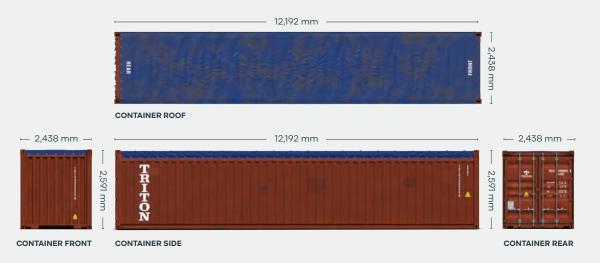

EXTERNAL DIMENSIONS

| Length | 12,192 mm | 40′ 0.0″ |
|--------|-----------|----------|
| Width | 2,438 mm | 8′ 0.0″ |
| Height | 2,591 mm | 8′ 6.0″ |

INTERNAL DIMENSIONS

| Length | 12,032 mm | 39′ 5.7′ |
|--------|-----------|----------|
| Width | 2,352 mm | 7′ 8.6′ |
| Height | 2,348 mm | 7′ 8.4′ |

DOOR OPENING

| Width | 2,340 mm | 7′ 8.1″ |
|--------|----------|---------|
| Height | 2,280 mm | 7′ 5.8″ |

CAPACITY & WEIGHTS

| Inside Cubic | Capacity | 65.9 m ³ | | 2330 ft ³ |
|--------------|-----------|---------------------|-----------|----------------------|
| Max Gross | 30,480-3 | 2,500 kg | 67,200-71 | ,650 lbs |
| Payload | 25,780-2 | 28,760 kg | 56,840-63 | 5,400 lbs |
| Tare | 3,700 kg- | -4,700 kg | 8,160–10 | ,360 lbs |

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.







Lease

Available via Triton's global network of supply locations.


20ft Refrigerated Container




- · Designed for safe transportation of temperature sensitive cargo and frozen & perishable goods. (Food-grade approved)
- · Ideal for on-site temperature controlled storage
- · Strong, robust, insulated and repair friendly

- · State-of-the art design and low power consumption makes units highly efficient
- Standard features: HGSS roof end panels, T-bar flooring and interior aluminum scuff lining
- · Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- · Can be ordered with Carrier, Starcool, Daikin or Thermo King machinery, with 3 Phase Power. These leading brands offer worldwide availability for parts and service
- Provisioned for track & trace feature
- · Resistant to bacteria

- Low heat leakage values
- · Low GWP refrigerants compatible
- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Available globally

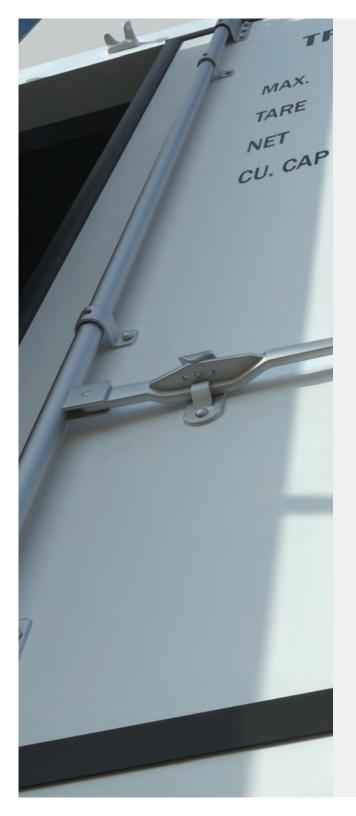

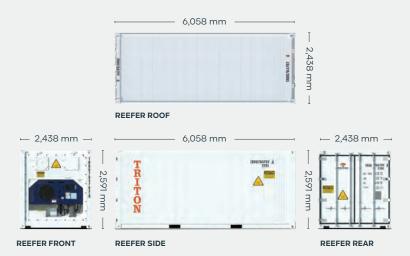

EXTERNAL DIMENSIONS

| Length | 6,058 mm | 19′ 10.5′ |
|--------|----------|-----------|
| Width | 2,438 mm | 8′ 0.0′ |
| Height | 2,591 mm | 8′ 6.0′ |

INTERNAL DIMENSIONS

| Length | 5,454 mm | 17′ 10.7" |
|--------|----------|-----------|
| Width | 2,290 mm | 7′ 6.2″ |
| Height | 2,276 mm | 7′ 5.6″ |

DOOR OPENING

| Width | 2,294 mm | 7′ 6.3″ |
|--------|----------|---------|
| Height | 2,264 mm | 7′ 5.1″ |

CAPACITY & WEIGHTS

| Inside Cubic Cap | acity 28.4 m ³ | 1003 ft ³ |
|------------------|---------------------------|----------------------|
| Max Gross | 30,480 kg | 67,200 lbs |
| Payload | 27,650 kg | 60,960 lbs |
| Tare* | 2,830 kg | 6,240 lbs |

^{*}Tare can vary slightly based on reefer machine type.

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.





Lease

Available via Triton's global network of supply

40ft High Cube Refrigerated Container





- · Additional height provides extra internal cubic capacity, which means greater interior stacking capacity for your goods
- · Designed for safe transportation of temperature sensitive cargo and frozen and perishable goods. (Food-grade approved)

- · Ideal for on-site temperature controlled storage
- · Strong, robust, insulated and repair friendly
- State-of-the-art design and low power consumption makes units highly efficient
- Standard features: HGSS roof end panels, T-bar flooring and interior aluminum scuff lining

- Provisioned for track & trace feature
- · Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Resistant to bacteria
- Low heat leakage values
- · Low GWP refrigerants compatible

- · Can be ordered with Carrier, Starcool, Daikin or Thermo King machinery, with 3 Phase Power. These leading brands offer worldwide availability for parts and service
- · Backed up by Triton's alobal network of supply locations and dedicated leasing and support teams
- Available globally

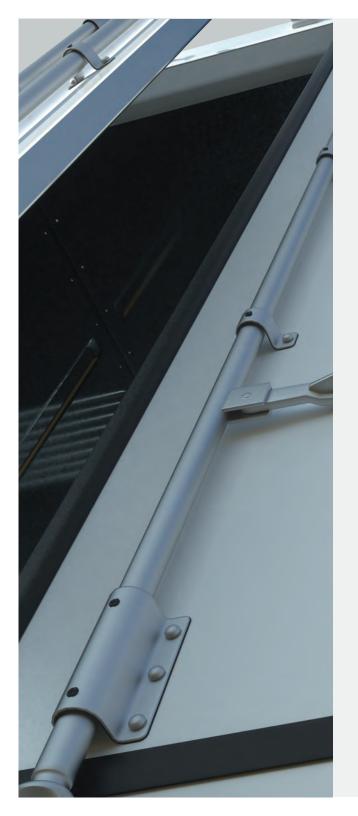

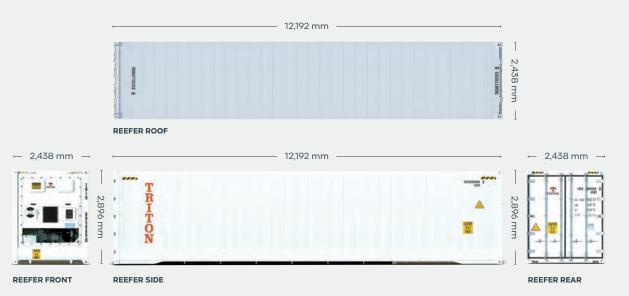

EXTERNAL DIMENSIONS

| Length | 12,192 mm | 40′ 0.0″ |
|--------|-----------|----------|
| Width | 2,438 mm | 8′ 0.0″ |
| Height | 2,896 mm | 9′ 6.0″ |

INTERNAL DIMENSIONS

| Length | 11,588 mm | 38′ 0.2′ |
|--------|------------|----------|
| Width | 2,290 mm | 7′ 6.2′ |
| Height | 2,547.5 mm | 8′ 4.3′ |

DOOR OPENING

| Width | 2,294 mm | 7′ 6.3″ |
|--------|----------|---------|
| Height | 2,569 mm | 8′ 5.1″ |

CAPACITY & WEIGHTS

| Inside Cubic Cap | acity 67.6 m³ | 2,387 ft ³ |
|------------------|---------------|-----------------------|
| Max Gross | 35,000 kg | 77,160 lbs |
| Payload | 30,440 kg | 67,110 lbs |
| Tare* | 4,560 kg | 10,050 lbs |

^{*}Tare can vary slightly based on reefer machine type.

NOTE: The dimensions and door openings of all containers correspond to ISO standards.

However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.





Lease

Available via Triton's global network of supply locations.

20ft Flush Folding Flatracks




- · Built to carry heavy or oversized cargoes
- · Great for specialized shipments of steel, pipes, drums and machinery
- Forklift pockets for easy empty handling

- Heavy duty steel frames and thick plank floors and lashing rings all around
- · With flush folding end frames to allow for efficient stacking and repositioning
- · Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- · Available in the high demand hub ports

- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Flexible lease terms to meet your company needs



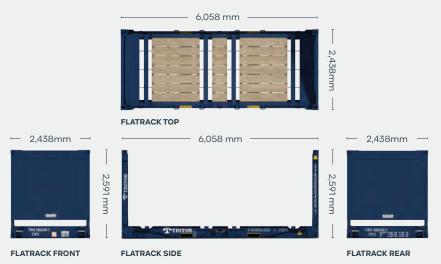

EXTERNAL DIMENSIONS

| Length (Base bottom casting) | 6,058 mm | 19′ 10.5′ |
|------------------------------|----------|-----------|
| Width (Base bottom casting) | 2,438 mm | 8′ 0.0′ |
| Height (End frame up) | 2,591 mm | 8′ 6.0′ |
| Height (End frame down) | 370 mm | 1′ 2.6′ |

INTERNAL DIMENSIONS

| Length (Between end panels) | 6,038 mm | 19′ 9.7″ |
|------------------------------------|----------|----------|
| Width (Over bottom side rail) | 2,194 mm | 7′ 2.4″ |
| Height (Side rail to top castings) | 2,233 mm | 7′ 3.9″ |

CAPACITY & WEIGHTS

| Max Gross | 45,000 kg | 99,200 lbs |
|-----------|-----------|------------|
| Payload | 42,000 kg | 92,590 lbs |
| Tare | 3,000 kg | 6,640 lbs |
| | | |

NOTE: The dimensions of containers correspond to ISO standards.

However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.





Lease

Available via Triton's global network of supply locations.

40ft Flush Folding Flatracks



- Built to carry heavy or oversized cargoes
- · Great for specialized shipments of steel, pipes, drums and machinery
- Forklift pockets for easy empty handling

- Heavy duty steel frames and thick plank floors and lashing rings all around
- · With flush folding end frames to allow for efficient stacking and repositioning
- · Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- · Available in the high demand hub ports

- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Flexible lease terms to meet your company needs





EXTERNAL DIMENSIONS

| Length (Base bottom casting) | 12,192 mm | 40′ 0.0′ |
|------------------------------|-----------|----------|
| Width (Base bottom casting) | 2,438 mm | 8′ 0.0′ |
| Height (End frame up) | 2,591 mm | 8′ 6.0′ |
| Height (End frame down) | 648 mm | 2′ 1.5′ |

INTERNAL DIMENSIONS

| Length (Between end panels) | 12,182 mm | 39′ 11.6′ |
|------------------------------------|-----------|-----------|
| Width (Over bottom side rail) | 2,374 mm | 7′ 9.5′ |
| Height (Side rail to top castings) | 1,959 mm | 6′ 5.1′ |

CAPACITY & WEIGHTS

| Max Gross | 52,500 kg | 115,740 lbs |
|-----------|-----------|-------------|
| Payload | 47,260 kg | 104,190 lbs |
| Tare | 5,240 kg | 11,550 lbs |

NOTE: The dimensions of containers correspond to ISO standards.

However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.





Lease

Available via Triton's global network of supply locations.

40ft High Cube Flush Folding Flatracks




- Additional height provides extra capacity for your goods
- Built to carry heavy or out of gauge cargoes
- Heavy duty steel frames and thick plank floors

- · Great for specialized shipments of steel, pipes, drums and machinery
- With flush folding end frames to allow for efficient stacking

- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Backed up by Triton's global network of supply locations and dedicated leasing and support teams
- Flexible lease terms to meet your company needs



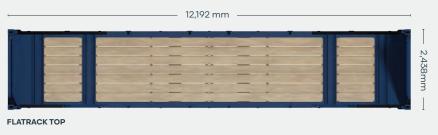







FLATRACK FRONT

FLATRACK SIDE

FLATRACK REAR

EXTERNAL DIMENSIONS

| Length (Base bottom casting) | 12,192 mm | 40′ 0.0″ |
|------------------------------|-----------|----------|
| Width (Base bottom casting) | 2,438 mm | 8′ 0.0" |
| Height (End frame up) | 2,896 mm | 9′ 6.0″ |
| Height (End frame down) | 648 mm | 2′ 1.5" |
| | | |

INTERNAL DIMENSIONS

| Length (Between end panels) | 12,182 mm | 39′ 11.6″ |
|------------------------------------|-----------|-----------|
| Width (Over bottom side rail) | 2,374 mm | 7′ 9.5″ |
| Height (Side rail to top castings) | 2,264 mm | 7′ 5.1″ |

CAPACITY & WEIGHTS

| Max Gross | 52,500 kg | 115,740 lbs |
|-----------|-----------|-------------|
| Payload | 47,220 kg | 104,100 lbs |
| Tare | 5,280 kg | 11,640 lbs |

NOTE: The dimensions of containers correspond to ISO standards.

However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.





Available via Triton's global network of supply locations.


40ft Used Flush Folding Flatracks



- Built to carry heavy or out of gauge cargoes
- · Great for specialized shipments of coiled steel, drums and machinery
- · Heavy duty steel frames and thick plank floors
- · Many with flush folding end frames to allow for efficient stacking

- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- · Available globally



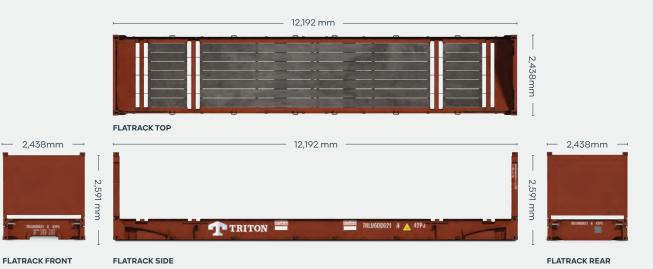

EXTERNAL DIMENSIONS

| Length (Base bottom casting) | 12,192 mm | 40′ 0.0′ |
|------------------------------|-----------|----------|
| Width (Base bottom casting) | 2,438 mm | 8′ 0.0′ |
| Height (End frame up) | 2,591 mm | 8′ 6.0′ |
| Height (End frame down) | 648 mm | 2′ 1.5′ |

INTERNAL DIMENSIONS

| Length (Between end panels) | 12,182 mm | 39′ 11.6″ |
|------------------------------------|-----------|-----------|
| Width (Over bottom side rail) | 2,374 mm | 7′ 9.5″ |
| Height (Side rail to top castings) | 1,959 mm | 6′ 5.1″ |

CAPACITY & WEIGHTS

| Max Gross | 45,000, 50,000 or 52,500kg 99,210, 110,230 or 115,740 lbs |
|-----------|--|
| Payload | 39,200 – 47,520kg 86,421 – 104,764 lbs |
| Tare | 4,780 kg – 5,800 kg 10,538 lbs – 12,787 lbs |

NOTE: The dimensions of containers correspond to ISO standards.

However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.






Available via Triton's global network of supply locations.

40ft Used High Cube Flush Folding Flatracks



- · Additional height provides extra capacity for your goods
- Built to carry heavy or out of gauge cargoes
- · Great for specialized shipments of coiled steel, drums and machinery
- · Heavy duty steel frames and thick plank floors
- · Many with flush folding end frames to allow for efficient stacking
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- · Available globally



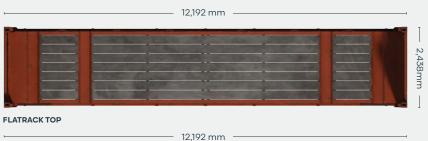



— 2,438mm —

FLATRACK SIDE

FLATRACK REAR

EXTERNAL DIMENSIONS

| Length (Base bottom casting) | 12,192 mm | 40′ 0.0′ |
|------------------------------|-----------|----------|
| Width (Base bottom casting) | 2,438 mm | 8′ 0.0′ |
| Height (End frame up) | 2,896 mm | 9′ 6.0′ |
| Height (End frame down) | 648 mm | 2′ 1.5′ |

INTERNAL DIMENSIONS

| Length (Between end panels) | 12,182 mm | 39′ 11.6″ |
|------------------------------------|-----------|-----------|
| Width (Over bottom side rail) | 2,374 mm | 7′ 9.5″ |
| Height (Side rail to top castings) | 2,264 mm | 7′ 5.1″ |

CAPACITY & WEIGHTS

TRLU600621 4 45P3

| Max Gross | 45,000 – 50,000 kg 99,210 – 110,230 lbs |
|-----------|--|
| Payload | 39,300 – 47,200 kg 86,640 – 104,060 lbs |
| Tare | 5,300 kg – 5,950 kg 11,680 lbs – 13,120 lbs |

NOTE: The dimensions of containers correspond to ISO standards.

However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

HERE. THERE. EVERYWHERE

We supply the world

Triton is the largest lessor of intermodal containers in the world with over 7 million TEU of containers. Our services are available in 89 countries around the globe. So, no matter where you need containers, we'll have them nearby. To find your nearest Triton Container Sales manager visit www.tritoncontainer.com.



Global inventory of cargoworthy containers for lease and sale.



Unrivaled container supply at competitive prices.



Outstanding and highly responsive customer services.



Global network of 20 offices and 3 independent agencies across 16 countries.



Equipment built to the highest quality.



Our size, strength and reliability make us the go-to supplier of intermodal shipping containers.



We're the biggest for a reason, contact our friendly experts and experience Triton's world-leading service and cost savings today. Imagine what we can do together.

www.tritoncontainer.com