




40ft High Cube Refrigerated Container

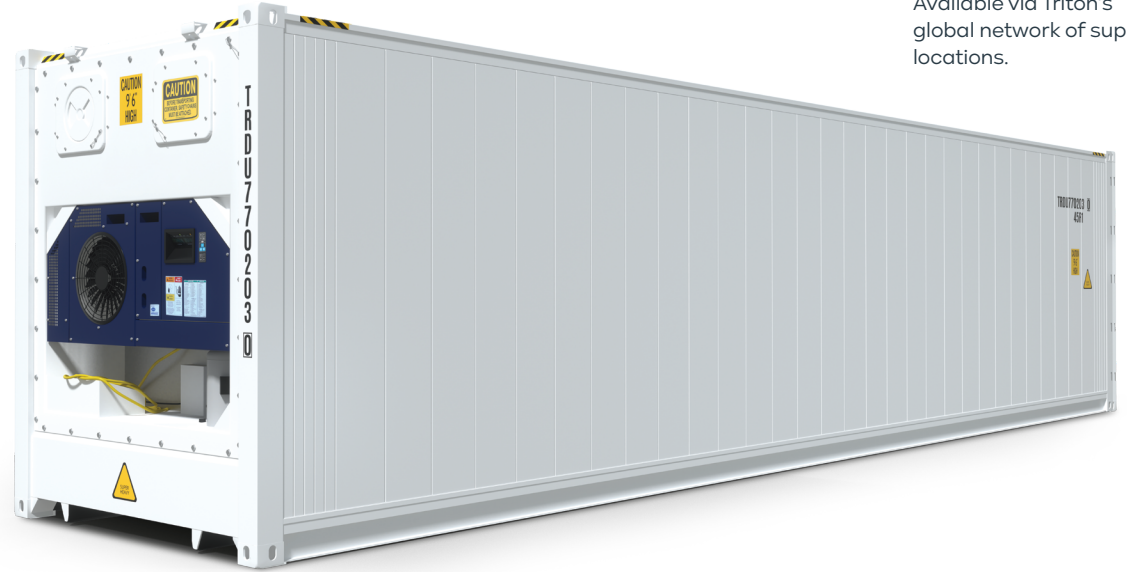

CLASSIFICATION

For Sale: New


Available via Triton's global network of supply locations.

FEATURES

- Additional height provides extra internal cubic capacity, which means greater interior stacking capacity for your goods
- Designed for safe transportation of perishable food, beverage and temperature sensitive cargo
- Ideal for on-site temperature controlled storage
- Strong, robust, insulated and repair friendly
- State-of-the-art design and low power consumption makes units highly efficient
- With HGSS roof end panels, vacuum valve, T-bar flooring and interior aluminum scuff lining
- Provisioned for track & trace feature
- Triton's industry leading new production testing and inspection criteria ensures the highest quality container
- Resistant to bacteria
- Low heat leakage values
- Low GWP refrigerants compatible
- Can be ordered with Carrier or Thermo King machinery, with 3 Phase Power and CFC friendly refrigerant. Both leading brands offer worldwide availability for parts and service
- Backed up by Triton's global network of supply locations and dedicated sales and support teams
- Available globally



REEFER ROOF

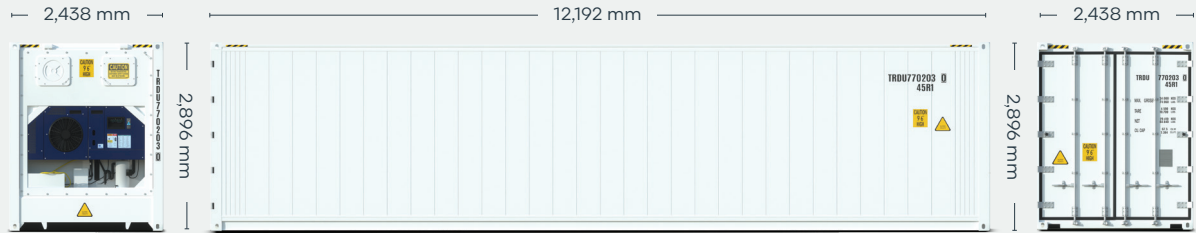

REEFER FRONT

REEFER SIDE

REEFER REAR

DIMENSIONS (METRIC/IMPERIAL)

EXTERNAL DIMENSIONS

| | | |
|---------------|-----------|----------|
| Length | 12,192 mm | 40' 0.0" |
| Width | 2,438 mm | 8' 0.0" |
| Height | 2,896 mm | 9' 6.0" |

INTERNAL DIMENSIONS

| | | |
|---------------|------------|----------|
| Length | 11,588 mm | 38' 0.2" |
| Width | 2,290 mm | 7' 6.2" |
| Height | 2,547.5 mm | 8' 4.3" |

DOOR OPENING

| | | |
|---------------|----------|---------|
| Width | 2,294 mm | 7' 6.3" |
| Height | 2,569 mm | 8' 5.1" |

CAPACITY & WEIGHTS

| | | |
|------------------------------|---------------------|-----------------------|
| Inside Cubic Capacity | 67.6 m ³ | 2,387 ft ³ |
| Max Gross | 35,000 kg | 77,160 lbs |
| Payload | 30,440 kg | 67,110 lbs |
| Tare* | 4,560 kg | 10,050 lbs |

*Tare can vary slightly based on reefer machine type.

NOTE: The dimensions and door openings of all containers correspond to ISO standards. However, due to production tolerances, a difference in measurement is possible.

DISCLAIMER: Every effort is made to ensure this information is accurate, however Triton does not assume any liability for the accuracy of the information and content provided in marketing or information materials, or for the consequences resulting from using the information and content provided. Triton does not guarantee or claim that said information and content is exhaustive. Claims as to the exhaustive nature of said information and content are excluded. The information and content is only provided for advertising purposes and is non-binding. No explicit or implied warranties or guarantees are made. The container displayed only represents a sample of the entire fleet.

The following items are registered or unregistered service marks in the United States and/or foreign jurisdictions pursuant to applicable intellectual property law and are the property of Triton International Limited and its subsidiaries: Triton® and TAL®.